

Summit 13200B

Rugged ± 10 to ± 40 g Uniaxial Accelerometer with Signal Conditioning and Temperature Sensor

Technical Data*



Features and Benefits

High Accuracy and Linearity over Wide Temperature Range

The voltage output for the 13200B is directly proportional to the acceleration along the axis. The DC-coupled output is fully scaled, referenced, and temperature compensated. Accuracy is improved by minimizing variations due to temperature and aging effects, resulting in a sensor that is more stable over temperature than piezoelectric or piezoresistive devices. Critical applications can use the built-in temperature sensor to compensate for residual temperature effects.

Calibration Certificate

Each 13200B can be supplied with an optional calibration certificate Listing gain, offset, and on-axis and transverse alignment parameters needed to ensure rapid and efficient system implementation. The alignment data can be used to compensate the measured values if needed.

Self-Test on Digital Command

A TTL-compatible self-test input causes a simulated acceleration to be injected into the accelerometer to verify channel integrity.

Small Size

Complete conditioned uniaxial accelerometer in less than a cubic inch.

Built-in Power Supply Regulation

Unregulated DC power from +8 to +30 volts is all that is required to measure accelerations. The 13200B is ideal for automotive applications with the ability to survive both continuous reverse battery to -20V and load dump transients to +60V.

Easy installation

Built-in terminal block or cable with 9-pin connector makes it easy to wire the 13200B. Two through holes and four tapped holes simplify mounting.

Suitable for Harsh Environments

The 13200B is robust and can be used in harsh environments. The unit will survive 500 g powered and 2000 g unpowered.

Simplify Acceleration and Temperature Measurements

The Summit Instruments 13200B accelerometer includes a temperature sensor in its small rugged package. The small size and built-in power regulation allow the 13200B to fit where other accelerometers can't. A power source of +8 to +30 VDC is all that is required to measure temperature and ± 10 g, ± 15 g, ± 20 g, ± 25 g, ± 30 g or ± 40 g accelerations.

When extra precision is required, the high repeatability of the built-in temperature allows precise compensation of temperature effects and alignment data provided on the optional calibration certificate can be used to compensate for transverse sensitivity and alignment errors.

Tested over the -40 to +85°C temperature range, the accelerometer has a nominal full scale output swing of ± 2 volts. The zero g output level is nominally +2.5 volts. Precise values for each axis are provided on the optional calibration certificate. Custom versions of the 13200B can be provided for applications which require different range and/or bandwidth.

*Data subject to change without notice

Summit 13200B


Specifications

TA = T_{MIN} to T_{MAX}, 8 ≤ VS ≤ 30 V, Acceleration = 0 g, unless otherwise noted.


Parameter	Min	Typical	Max	Units	Conditions/Notes
Range					
Measurement Full Scale	±10		±40	g	Must specify via Opt. Rnnn
Shock survival, powered	-500		+500	g	Any axis for 0.5 ms. Recovers on power cycle.
Shock survival, unpowered	-2000		+2000	g	Any axis for 0.5 ms.
Sensitivity					
At 25°C, ±40 g FSR		56 [†]		mV/g	Precise values on Opt. C001 cal certificate.
Drift T _{MIN} to T _{MAX}		±0.5		%	Percent of sensitivity at 25°C
Zero G Bias Level					
At 25°C	2.1		2.9	V	Precise values on Opt. C001 cal certificate.
Drift T _{MIN} to T _{MAX}		±0.2		g	Repeatable, can be compensated.
Alignment					
Deviation from ideal axes		±2.0	±3.0	degrees	Precise values on Opt. C001 cal certificate. Can be compensated if required.
Transverse Sensitivity					
		0.25		%	Inherent sensor error, excluding misalignment.
Nonlinearity					
		0.2		% FSR	Best fit straight line.
Upper Cutoff Frequency					
	4.6		1000	Hz	-3dB point ±10% Must specify via Opt. Bnnn.
Noise					
Density		1	2.5	mg/Ö Hz	4 Hz to 1 kHz
Amplitude DC to 100 Hz		10		mg rms	
Self Test Input Impedance					
	30	50		kW	To ground. Logic "1" = 2V, Logic "0" = 0.8V
Temperature Sensor					
Sensitivity		8.25		mV/°K	Precise values on Opt. C002 cal certificate.
Repeatability			±0.1	°C	V _T at -40°C » 1.92V ; V _T at +85°C » 3.16V
Long term drift			±0.1	°C	At 25°C after temperature cycle
Absolute error			±3	°C	25°C offset removed (±5°C uncorrected)
Outputs					
Output voltage swing	0.05		4.95	V	I _{OUT} = ±0.5 mA
Capacitive Drive Capability	1000			pF	Accelerometer output; T output drives 300pF
Power Supply (Vs)					
Input voltage limits	-20		+60	V	-20V continuous, >30V if <100ms, duty <1%
Input voltage - operating	+8		+30	V	
Input current		6	9	mA	No load, quiescent.
Rejection Ratio	80	120		dB	DC
Temperature Range (TA)					
	-40		+85	°C	Terminal block Opt. T000 rated to -30°C
Mass					
		35		g	Precise value on Opt. C001 cal certificate.

[†] Scale linearly with range option Rnnn.

Mechanical

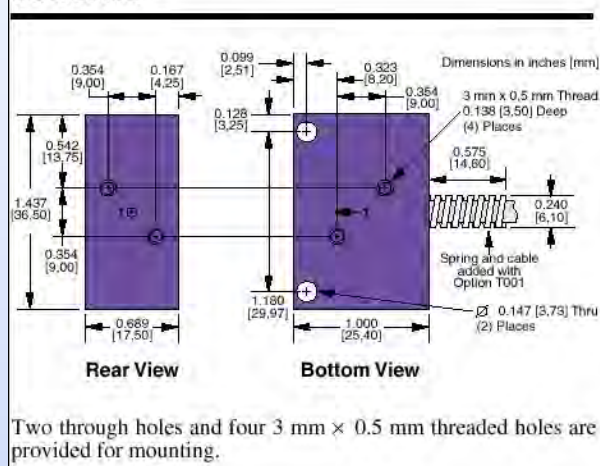

Connections

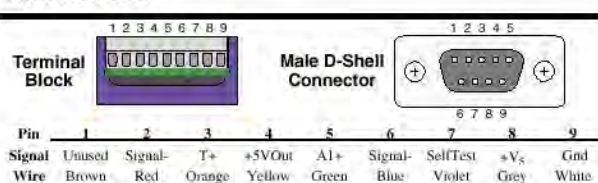

Ordering Information

- 13200B** Uniaxial accelerometer ±10 to ±40 g (-Bnnn, -Rnnn, & -Tnnn options required)
 Bandwidth 3 dB cutoff (nnn Hz)
- Bnnn Add calibration certificate
 - C001 Add temperature calibration
 - C002 Range (±nnn g FSR)
 - Rnnn Terminal block (T000) or (nnn foot) cable with 9-pin male D-subminiature connector at end
 - Tnnn Extend warranty from 1 year to 2 years