


### Sensor Specification

**Measuring Range** -50°C to 600°C (-58°F to 1112°F)  
**Sensor Type** PT100 (Class A)

### Sensor Accuracy

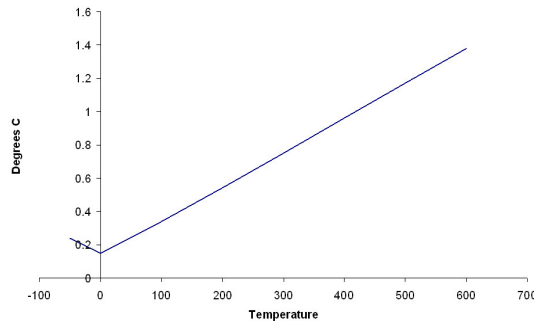

### Physical Specification

**Weight** 80g

**Response Time**  
**Water** 30 Seconds (to 90% FSD)

**Probe**  
**Material** Stainless steel (316)  
**Temperature rating** -50°C to 600°C (-58°F to 1112°F)

**Sheath/Cable Join Strain Relief Spring**  
**Material** Stainless steel (316)  
**Temperature rating** -50°C to 600°C (-58°F to 1112°F)

**Cable**  
**Material** Heavy duty glass fibre with stainless steel over-braid  
**Temperature rating** -50°C to 600°C (-58°F to 1112°F)

**Connector**  
**Material** Nickel Plated Brass/Zinc Alloy  
**Temperature rating** -25°C to 85°C (-13°F to 185°F)

### Notes

This probe can be supplied with either a 1.5m or 3m cable.

For specialist use, for example applications bringing the product into direct contact with food, we can supply material data sheets so you can assess the suitability of this product for your application.

### Calibration

A UKAS traceable certificate of calibration can be supplied for an additional charge at the point of purchase.

### Approvals

This product is manufactured by Gemini Data Loggers (UK) Ltd to BS EN ISO9001:2000 (Certificate No. 6134).



### Related Products

This probe is suitable for use with the following products:

**Tinytag Plus 2 model number:**

TGP-4104

**Tinytag View 2 model number:**

TV-4104