



- **4-digit 14 segment LED indicator**
- **Universal voltage supply**
- **Front key programmable**
- **Input for mA, V, Pt100, TC and Potm.**
- **2 Relays and analogue output**

**Application:**


- Display for digital readout of current, voltage, temperature or 3-wire potentiometer signals.
- Process control with 2 potential free relays and / or analogue output.
- For local readout in extreme wet atmospheres with a special designed splash-proof cover.

**Technical characteristics:**

- 4-digit LED indicator with 13,8 mm 14 segment characters. Max. display readout -1999...9999 with programmable decimal point, relay ON / OFF-indication.
- All operational parameters can be adjusted to any application by use of the front keys.
- PReview 5714 is available fully-configured according to specifications ready for process control and visualisation.
- In versions with relay outputs the user can minimise the installation test time by activating / deactivating each relay independent of the input signal.


**Mounting:**

- To be mounted in front panel. An included rubber packing must be mounted between the panel cutout hole and the display front to obtain IP65 (NEMA 4) tightness. PReview 5714 can be delivered with a special designed splash-proof cover as accessory to obtain IP67 tightness.

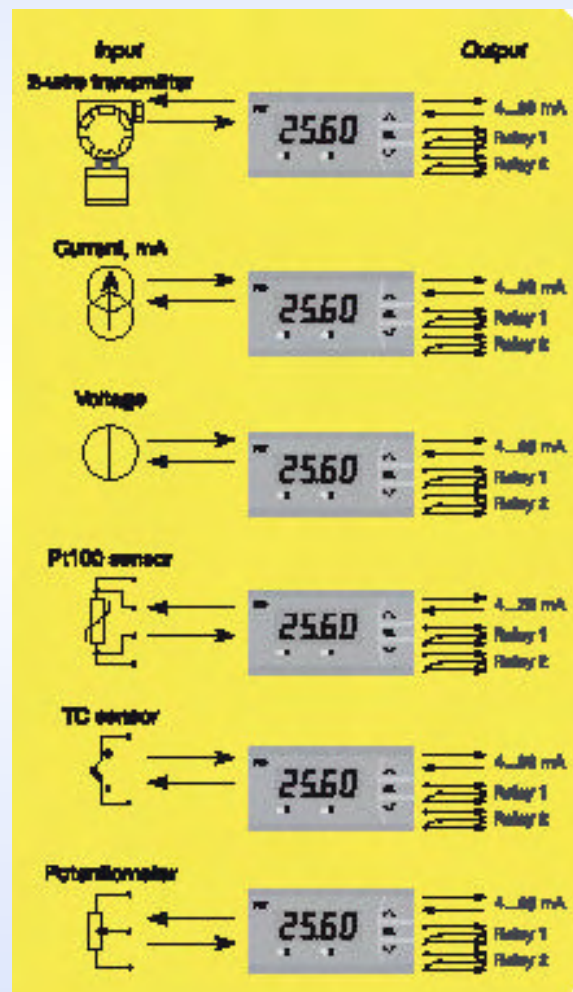

# PROGRAMMABLE LED INDICATOR

# 5714

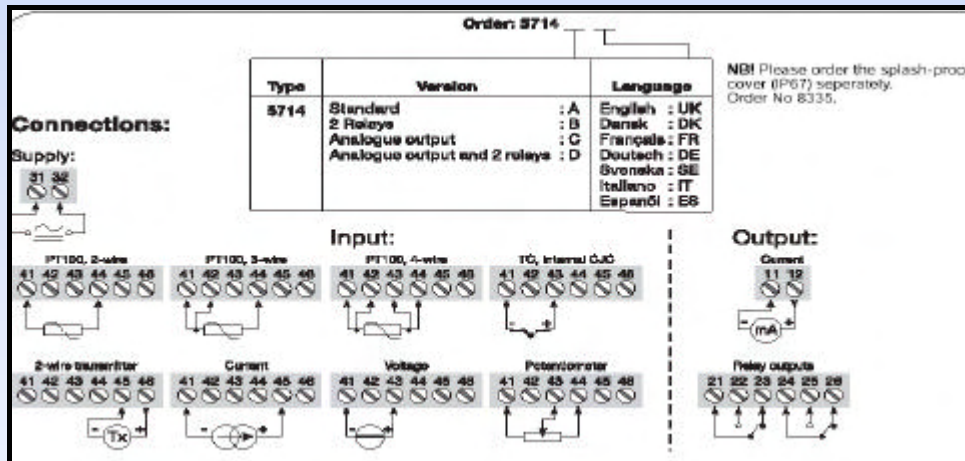

NI! Please order the splash-proof cover (IP67) separately. Order No 8335.

**Electrical specifications:**

Specifications range:

-20°C to +60°C

**Common specifications**

Supply voltage..... 24...230 VAC ±10%

50...60 Hz

24...250 VDC ±20%

Max. consumption..... ≈3.5W

Isolation voltage / operation..... 2.3 kVAC / 250 VAC

Signal / noise ratio..... min. 60 dB (0...100 kHz)

Response time (0...90 %, 100...10 %):

Temperature input..... < 1 s

Current / Voltage input..... < 400 ms

Calibration temperature..... 20...28°C

Accuracy, the greater of general and basic values:

General Values		
Input type	Absolute accuracy	Temperature coefficient
All	= ± 0.1% of reading	= ± 0.01% of reading/°C

Basic values		
Input type	Basic accuracy	Temperature coefficient
mA	= ± 4µA	= ± 0.4µA/°C
Volt	= ± 20µV	= ± 2µV/°C
Pt100	= ± 0.2°C	= ± 0.02°C/°C
Potentiometer	= ± 0.1	= ± 0.01Ω/°C
TC type: E,J,K,L,N,T,U	= ± 1°C	= ± 0.05°C/°C
TC type: B,R,S,W3,W5	= ± 2°C	= ± 0.2°C/°C

EMC immunity influence.....	< ± 0.5% of reading
-----------------------------	---------------------

**Auxiliary supplies:**

2 wire supply ..... 25...16 VDC / 0...20 mA

Wire size, pin 41-46 (max.) ..... 1 x 1.5 mm 2 multicore cable

Wire size, others (max.) ..... 1 x 2.5 mm 2 multicore cable

Screw terminal torsion..... 0.5 Nm

Relative humidity ..... < 95% RH (non cond.)

Dimensions (HxWxD)..... 48 x 96 x 120 mm

Cutout dimensions ..... 44.5 x 91.5 mm

Tightness (mounted in panel) ..... IP65 (IP67 w. cover 8335)

Weight..... 230 g

**Pt100- and Potentiometer input:**

Input type	Min value	Max value	Norm
Pt100	-200°C	+850°C	IEC60751
Potentiometer	10Ω	100kΩ	-

Cable resistance pr. wire, Pt100 (max.)50 Ω

Sensor current, Pt100 ..... Nom. 0.2 mA

Effect of sensor cable resistance

(3- / 4-wire), Pt100..... < 0.002 Ω/Ω

Sensor error detection, Pt100 ..... Yes

Short circuit detection, Pt100 ..... < 15 Ω

**TC input:**

Type	Min. value	Max. value	Norm
B	+400°C	+1820°C	IEC 60584-1
E	-100°C	+1000°C	IEC 60584-1
J	-100°C	+1200°C	IEC 60584-1
K	-180°C	+1372°C	IEC 60584-1
L	-200°C	+900°C	DIN 43710
N	-180°C	+1300°C	IEC 60584-1
R	-50°C	+1760°C	IEC 60584-1
S	-50°C	+1760°C	IEC 60584-1
T	-200°C	+400°C	IEC 60584-1
U	-200°C	+600°C	DIN 43710
W3	0°C	+2300°C	ASTM E988-90
W5	0°C	+2300°C	ASTM E988-90

Cold junction compensation (CJC) ... < ±1.0 °C

Sensor error detection..... Yes

Sensor error current:

when detecting ..... Nom. 2 µA

else ..... 0 µA

**Current input:**

Measurement range ..... -1...25 mA

Programmable measurement ranges 0...20 and 4...20 mA

Input resistance..... Nom. 20 Ω + PTC 25 Ω

**Voltage input:**

Measure range..... -20 mV...12 VDC

Programmable measurement ranges 0...1, 0.2...1,

0...10 and 2...10 VDC

Input resistance..... Nom. 10 MΩ

**Display:**

Display readout ..... -1999...9999 (4 digits)

Decimal point ..... Programmable

Digit height ..... 13.8 mm

Display updating ..... 2.2 times / s

Input outside input range is

indicated by..... Explaining text

**Current output:**

Signal range (span)..... 0...20 mA

Programmable signal ranges..... 0...20, 4...20,

20...0 and 20...4 mA

Load (max.)..... 20 mA / 800 Ω / 16 VDC

Load stability ..... -0.01% of span / 100 Ω

Sensor error detection..... 0 / 3.5 / 23 mA or none

NAMUR NE 43 Upscale ..... 23 mA

NAMUR NE 43 Downscale ..... 3.5 mA

Current limit ..... -28 mA

**Relay outputs:**

Max. voltage..... 250 VRMS

Max. current ..... 2 A / AC

Max. AC power..... 500 VA

Max. current at 24 VDC..... 1 A

Sensor error detection..... Make/Break/Hold

**Marine approval: (NB. Marine and UL certifications pending)**

Det Norske Veritas Rules for ships... Certificat. Notes No.2.4

**Observed authority requirements: Standard:**

EMC 89/336/EEC:

Emission and immunity..... EN 61326

LVD 73/23/EEC..... EN 61010-1

UL, Standard for Safety: ..... UL 508 and UL 873