

Tinytag Connection Cables, Inductive Pads and Connectors.

ACS-3020, ACS-3030, ACS-9700, ACS-9701, ACS-9703, ACS-9750,
CAB-0005, CAB-0005-USB, CAB-0007, CAB-0007-USB, CAB-0527,
CAB-3239, CAB-3246, CAB-3233.

Issue 4

5th April 2007
E&OE



Tinytag Serial and USB Download Cables

CAB-0005, CAB-0007, CAB-0005-USB & CAB-0007-USB

Issue 4 : 5th April 2007 (E&OE)

Tinytag Serial Download Cables

CAB-0005 Tinytag Transit/Talk Serial Download Cable



For Use With	TG-0050 and all Tinytag Talk 2 data loggers
PC Connection	9-way Serial Port
Cable Length	1m
Weight	60g

CAB-0007 Tinytag Ultra/Plus/View Serial Download Cable



For Use With	All Tinytag Ultra, Plus and View data loggers.
PC Connection	9-way Serial Port
Cable Length	1m
Weight	60g

Tinytag USB Download Cables

CAB-0005-USB Tinytag Transit/Talk USB Download Cable



For Use With	TG-0050 and all Tinytag Talk 2 data loggers
PC Connection	USB Port
Cable Length	1m
Weight	60g

CAB-0007-USB Tinytag Ultra/Plus/View USB Download Cable



For Use With	All Tinytag Ultra, Plus and View data loggers.
PC Connection	USB Port
Cable Length	1m
Weight	60g

Notes

Supported operating systems are Windows 2000 and XP.

A CD containing device drivers and a Tinytag USB User Guide are supplied with the cable.

Notes

Supported operating systems are Windows 2000 and XP.

A CD containing device drivers and a Tinytag USB User Guide are supplied with the cable.

data sheet

Tinytag Download Cables and Inductive Pads

CAB-0527, ACS-3020 & ACS-3030

Issue 4 : 5th April 2007 (E&OE)

Tinytag Connection Accessories

CAB-0527 CAB-0005 to CAB-0007 Converter



Converts a CAB-0005 into a CAB-0007.

For Use With A CAB-0005 and all Tinytag Ultra, Plus and View 2 data loggers.

Cable Length 0.2m
Weight 16g

Tinytag Inductive Pads

ACS-3020 General Tinytag Serial Inductive Pad



For Use With All Inductive Loggers
PC Connection 9-way Serial Port
Cable Length 1m
Weight 245g
Battery Type 9V PP3 Alkaline battery
Replacement Interval Annually

ACS-3030 General USB Inductive Pad



For Use With All Inductive Loggers
PC Connection USB Port
Cable Length 1m
Weight 170g

Notes

Supported operating systems are Windows 2000 and XP.

A CD containing device drivers and a Tinytag USB User Guide are supplied with the pad.

data sheet

Tinytag/Talk Input Leads

CAB-3239 Tinytag Voltage/XP Input Lead



For Use With TGPR-0704, TGPR-0705, TGPR-0805 & TGPR-1002

Cable Length 1m
Weight 50g

Connection Information

Plug Pin No.	Colour	Function
A	Red	2.5V Reference
B	Green	12V (NOT TGPR-0704)
C	White	Sense Line (TGPR-0704)
D	Black	Common/0V
E	Yellow	Signal Input

CAB-3246 Tinytag Current, Millivolt, Count Input Lead



For Use With TGPR-0804, TGPR-1001 and TGPR-1201

Cable Length 1m
Weight 30g

Connection Information

Plug Pin No.	Colour	Function
A	Blue	Common/0V
B	Red	Signal Input

CAB-3233 Talk Voltage/Current Input Lead



For Use With TK-4702, TK-4802

Cable Length 0.2m

Weight 5g

Connection Information

Jack Plug	Colour	Function
Tip	White	Sense Line
Ring	Yellow	Signal Input
Shank	Black	Common/0V

Tinytag Input Plugs

ACS-9700 2 Pin Plug



For Use With TGPR-0804, TGPR-1001 and TGPR-1201

Weight 15g

Connection Information

Plug Pin No.	Function
A	Common/OV
B	Signal Input

ACS-9701 3 Pin Plug



For Use With All Tinytag Ultra*, Plus and View data loggers.

Weight 15g

Connection Information

Plug Pin No.	Function
A	RX (logger)
B	TX (logger)
C	Ground

ACS-9703 5 Pin Plug



For Use With TGP-4104, TGP-4204, TV-4104, TV-4204, TGPR-0704, TGPR-0705, TGPR-0805, TGPR-1002,


Weight 15g

Connection Information for TGPR data loggers

Plug Pin No.	Function
A	2.5V Reference
B	12V (NOT TGPR-0704)
C	Sense Line (TGPR-0704)
D	Common/OV
E	Signal Input

*To use with the Tinytag Ultra, remove the threaded retaining ring.

ACS-9750 K Type Thermocouple Plug

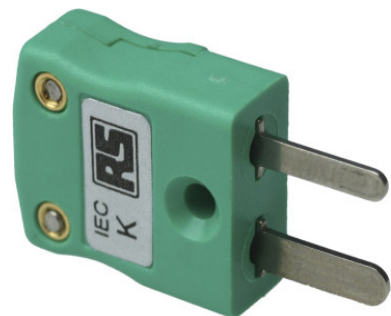

For Use With TGI-3250

Weight 5g